



POINTI : Automatic Soap Dispenser 、Rearview Mirror 、Scanner 、Central Locks

用途：電動給皂機、後視鏡鏡面調整、掃描器、中控鎖

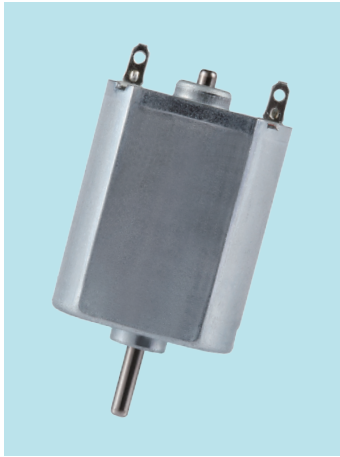

DIRECTION OF ROTATION

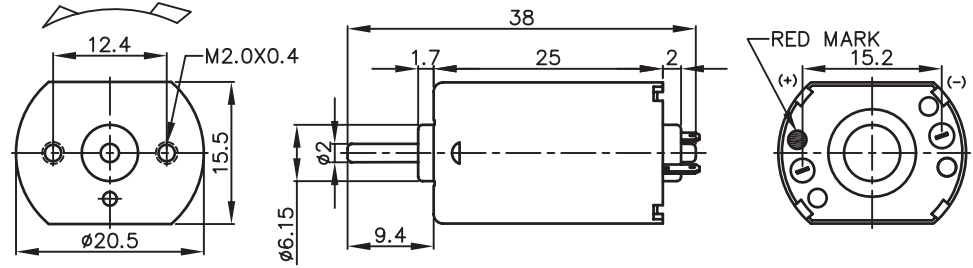

WEIGHT :20g(APPROX)

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL			
	OPERATING RANGE	NOMNAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFF	CURRENT	TORQUE		
			rpm	A	rpm	A	g-cm	mN-m	W	%	A	g-cm	mN-m
FK-130SH-09450	6.0 - 24.0	12.0V CONSTANT	7200	0.08	5650	0.13	12.82	1.26	0.74	50.56	0.43	59	5.78
FK-130SH-13240	3.0 - 24.0	24.0V CONSTANT	27000	0.17	22573	0.53	28.29	2.77	6.56	53.25	3.05	203	19.90
FK-130SH-13245	3.0 - 18.0	12.0V CONSTANT	13000	0.20	8621	0.59	30.91	3.03	2.74	42.00	1.55	106	10.39
FK-130SH-18150	3.0 - 15.0	12.0V CONSTANT	19100	0.27	13643	0.84	34.79	3.41	4.87	49.00	2.85	153	15.00

馬達的出軸長度及性能參數，EMC 對策可依客人要求做調整，詳情可詢問相關業務人員。
Please inquire your sales representative for output, performance and EMC solution.

